


FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

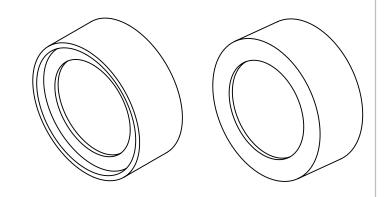



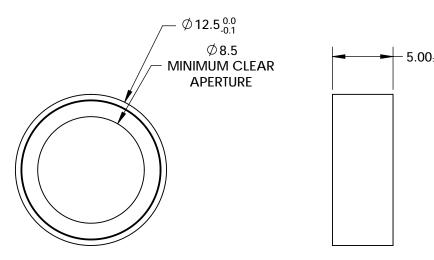

→	$-5.00_{\pm 0.10}$
	0.0010.10

R	Δ	N	D	Δ	SS	FI	ш	Т	FΊ	D)
n	м	ı١	 '-	$\boldsymbol{-}$		ш		ш		м	

REV. 001	VALUE
CENTER WAVELENGTH (CWL)	766 ± 2nm
FULL WIDTH HALF MAX (FWHM)	10 ± 2nm
MINIMUM TRANSMISSION	≥85 %
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A, SECT. 3.4.1
ENVIRONMENTAL	MIL-STD-801F, SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE **DIMENSIONS ARE FOR REFERENCE ONLY**

			Edmund Optic	S®	
THIRD ANGLE PROJECTION		TITLE	OD4, Ø12.5mm, 766nm x 10nm, HC, BP FILTER		
ALL DIMS IN	mm	DWG NO	65116	SHEET 1 OF 1	