


## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

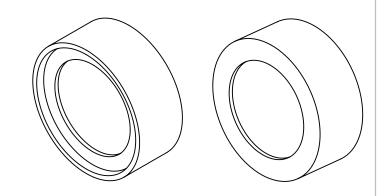



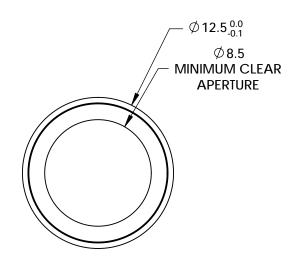

-	5.00±0.10

R	Δ	N	n	D	Δ	SS	FI	ш	ΤI	FΊ	D	
n	м	w	.,	-	н	.).)	ГΙ	ш		ГΙ	π	

REV. 001	VALUE
CENTER WAVELENGTH (CWL)	780 ± 2nm
FULL WIDTH HALF MAX (FWHM)	10 ± 2nm
MINIMUM TRANSMISSION	≥85%
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497A, SECT. 3.4.1
ENVIRONMENTAL	MIL-STD-801F, SECT. 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

		Edmund Optics®
IIRD ANGLE	TITLE	OD4, Ø12.5mm, 780nm x 10nm, HC, BP FILTER

THIRD ANGLE PROJECTION TITLE

ALL DIMS IN mm DWG NO 65117 SHEET 1 OF 1