
NOTES:

- 1. SUBSTRATE MATERIAL: ALUMINUM
- 2. FINISH (EXCEPT SURFACE S1): BLACK ANODIZED


3. COATING (APPLY ACROSS CLEAR APERTURE) S1: PROTECTED GOLD R(AVG) >94% @ 700 - 800nm R(AVG) >97% @ 800 - 2000nm R(AVG) >98% @ 2000 - 12000nm


SURFACE ROUGHNESS: <175 Å RMS


- 4. FOCAL LENGTH TOLERANCE: ±1%
- 5. ROHS COMPLIANT

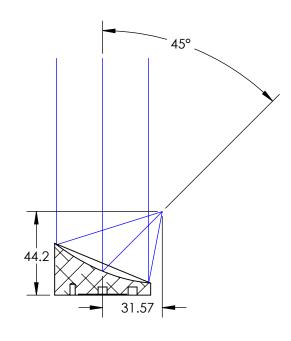

FOR INFORMATION ONLY: PARTS TO THIS DRAWING



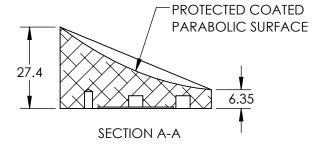

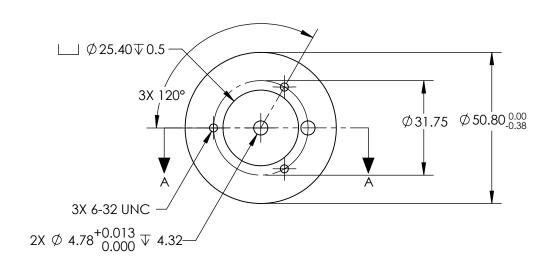

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	\$1 PARABOLIC				Edmund Optic	S®
REFLECTIVE WAVEFRONT DISTORTION AT 632.8nm (RMS) SURFACE FIGURE AT 632.8nm (RMS)	1λ λ/2	THIRD ANGLE PROJECTION		TITLE	Ø50.8 X 44.64mm EFL 45° OFF-AXIS PARABOLIC GOLD MIRROR 175A	
CLEAR APERTURE	90%					
BEVEL	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	84592	SHEET 1 OF 1