## NOTES:

- 1. SUBSTRATE MATERIAL:
- ALUMINUM
- 2. FINISH (EXCEPT SURFACE S1): BLACK ANODIZED
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1: BARE GOLD


R(AVG) >94% @ 700 - 800nm R(AVG) >97% @ 800 - 2000nm R(AVG) >98% @ 2000 - 12000nm


SURFACE ROUGHNESS: <175 Å RMS


- 4. FOCAL LENGTH TOLERANCE: ±1%
- 5. ROHS COMPLIANT





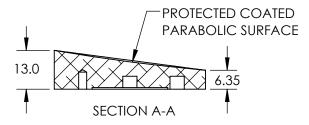

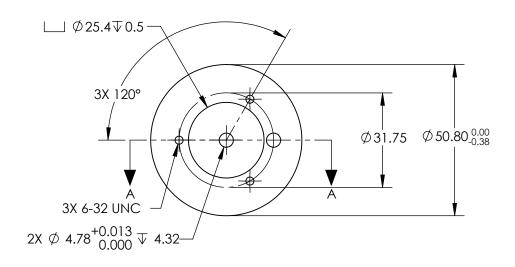

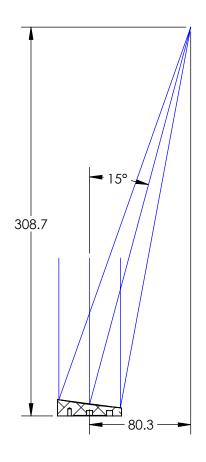

## SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	\$1			Edmund Optic	<b>C</b> ®
SHAPE	PARABOLIC				
REFLECTIVE WAVEFRONT DISTORTION AT 632.8nm (RMS)	1λ	ı		Ø50.8 X 310.08mm EFL 15° OFF-AX	21
SURFACE FIGURE AT 632.8nm (RMS)	λ/2	THIRD ANGLE PROJECTION	TITLE	PARABOLIC BARE GOLD MIRROR 175A	
CLEAR APERTURE	90%	'			
BEVEL	PROTECTIVE AS NEEDED	ALL DIMS IN mm	DWG NO	86286	SHEET 1 OF 1