NOTES:


- SUBSTRATE: Float Glass
- 2. COATING (APPLY ACROSS CLEAR APERTURE) S1: Protected Aluminum (400-700nm) R(AVG) >85% @ 400 - 700nm @ 45°


S2: NONE



SEAMED EDGES

4. Rohs Compliant



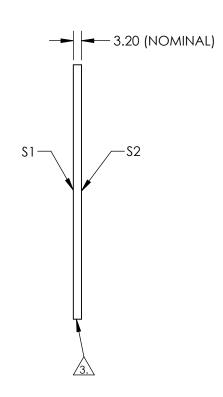

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	S2				Edmund Option	C®
SHAPE	PLANO	PLANO					
SURFACE QUALITY	80-50	N/A		1		85 x 101mm, 4-6λ Mirror	
SURFACE FLATNESS	4 - 6λ	N/A	THIRD ANGLE PROJECTION		TITLE	OS X TOTTITIT, 4 OX WIIITOI	
CLEAR APERTURE	Ø 76.5 x 90.9	N/A					CLIEFT
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	32362	SHEET 1 OF 1