
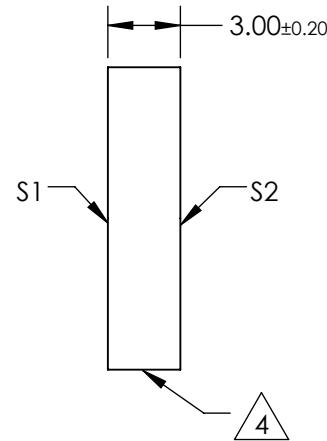


NOTES:

1. SUBSTRATE:  
N-BK7
2. S2 TO BE PARALLEL WITH S1 TO  $<1$  ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1 & S2: RAVG  $\leq 0.4\%$  @ 425 - 675nm
4. FINE GRIND SURFACE
5. RoHS COMPLIANT
6. SURFACE FLATNESS (P-V):  
 $\lambda/4$  (per inch over clear aperture)

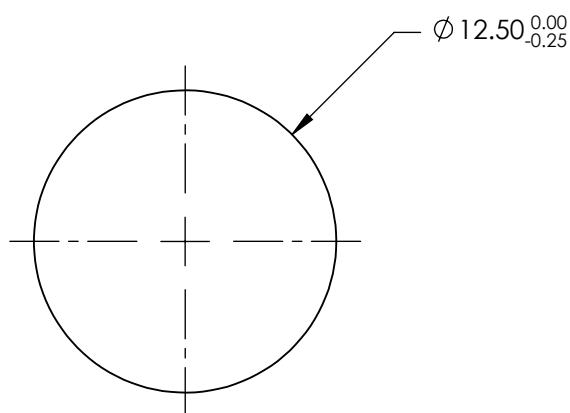

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	$\varnothing 11.25$	$\varnothing 11.25$
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION	TITLE	12.5mm DIA., 3mm THICK, VIS 0° COATED $\lambda/4$ N-BK7 WINDOW	
ALL DIMS IN	mm	DWG NO	SHEET 1 OF 1
		47517	

**Edmund Optics®**