
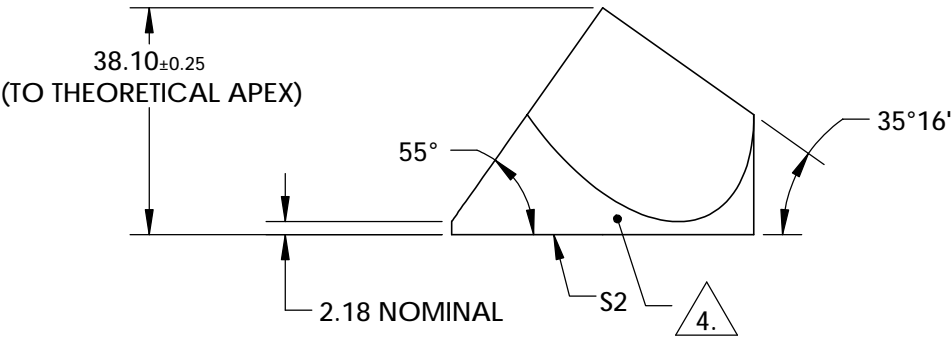



NOTES:

- 1. SUBSTRATE : FUSED SILICA
- 2. BLACK OVERPAINT IS 30-60 μm THICK
- 3. COATING (APPLY ACROSS COATING APERTURE)
S1: ALUMINUM WITH PROTECTED OVERCOAT (BLACK OVERPAINT)
R(AVG)>85% FROM 400-700nm, @ 45° AOI



S2: UNCOATED

- 4. FINE GRIND SURFACE
- 5. ROHS COMPLIANT
- 6. CLEAR APERTURE (%): 95

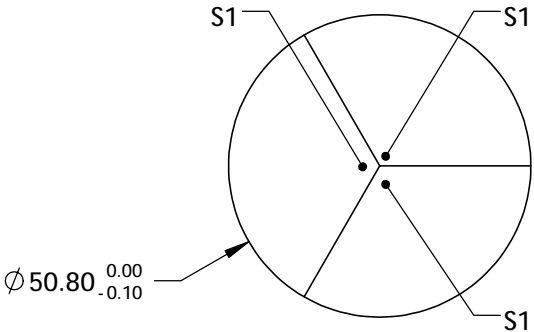

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV A	S1 & S2	 Edmund Optics®		
SURFACE FLATNESS	λ/10			
SURFACE QUALITY	20-10		TITLE	50.8mm ALUMINUM COATED, FUSED SILICA CORNER CUBE
WAVELENGTH RANGE	400 - 700 nm		DWG NO	49015
ANGLE TOL. (arcsec)	3	ALL DIMS IN	mm	SHEET 1 OF 1
BEVEL	PROTECTED AS NEEDED			