
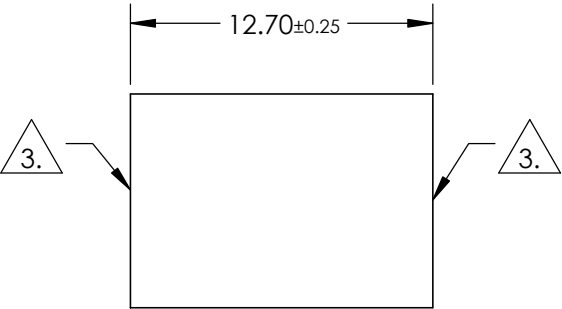
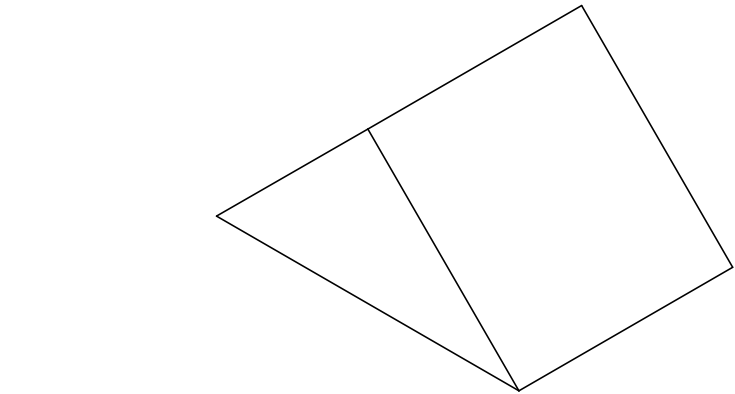


NOTES:

- 1. SUBSTRATE : CALCIUM FLUORIDE (CAF²)
- 2. COATING (APPLY ACROSS CLEAR APERTURE)
S1: UNCOATED
S2: UNCOATED

3. FINE GRIND SURFACE

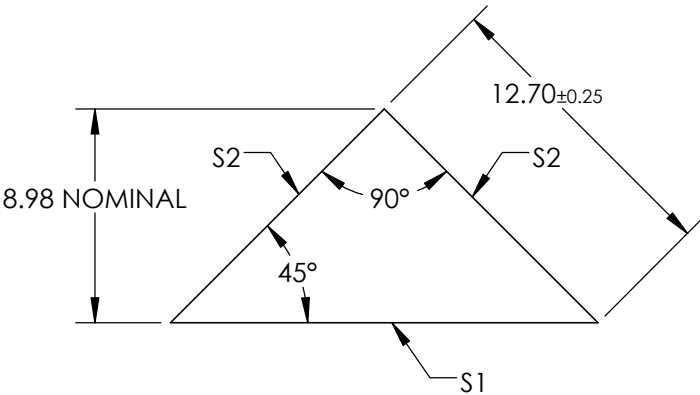

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2
CLEAR APERTURE	85%	85%
ANGLE TOL. (arcmin)	±10	±10
SURFACE QUALITY	40-20	40-20
SURFACE FLATNESS	2λ	2λ
WAVELENGTH RANGE (nm)	350 - 7000	350 - 7000
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION		Edmund Optics®	
ALL DIMS IN		TITLE	CALCIUM FLUORIDE, 12.7mm, UNCOATED, IR RIGHT ANGLE PRISM
mm		DWG NO	64116
			SHEET 1 OF 1