




NOTES:

- 1. SUBSTRATE:
N-BK7
- 2. S2 TO BE PARALLEL WITH S1 TO <1 arcmin
- 3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: RAVG ≤0.5% @ 600 - 1050nm

4. FINE GRIND SURFACE

5. RoHS COMPLIANT

6. SURFACE FLATNESS (P-V):
λ/4 (per inch over clear aperture)

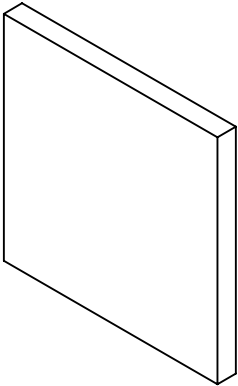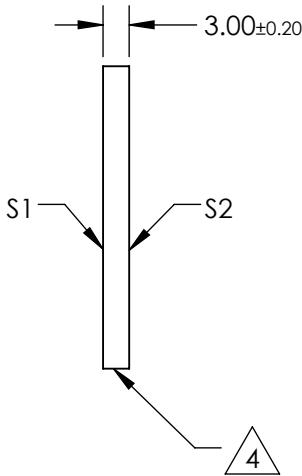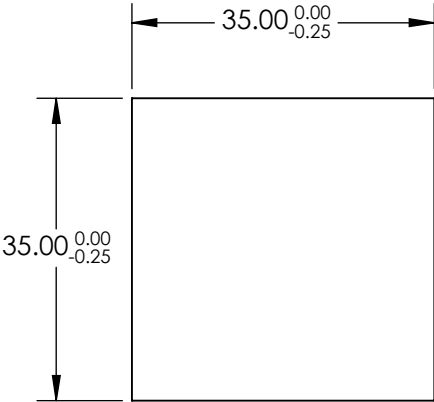


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	31.50 x 31.50	31.50 x 31.50
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE
PROJECTION



ALL DIMS IN

mm

TITLE

35mm SQ., 3mm THICK, NIR I COATED λ/4 N-BK7 WINDOW

DWG NO

83475

SHEET
1 OF 1