## NOTES:


- SUBSTRATE: Float Glass
- 2. COATING (APPLY ACROSS CLEAR APERTURE) \$1: Protected Aluminum (400-700nm) R(AVG) >85% @ 400 - 700nm @ 45°


S2: NONE



SEAMED EDGES

Rohs Compliant

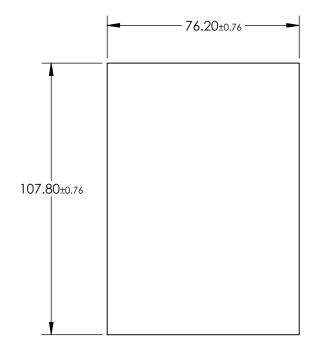

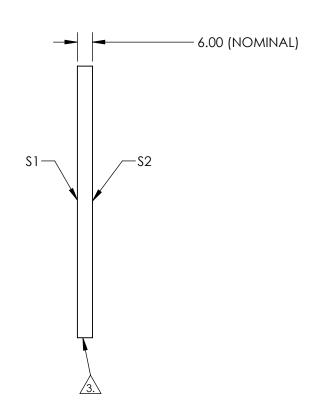

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	\$1 PLANO	\$2 PLANO			B	<b>Edmund Optic</b>	S®
SURFACE QUALITY	80-50	N/A				76.2 x 107.8mm, 4-6λ Mirror	
SURFACE FLATNESS	4 - 6λ	N/A	THIRD ANGLE PROJECTION		TITLE	7 0.2 X 107 .011111, 4 0X 74111101	
CLEAR APERTURE	Ø 68.58 x 97.02	N/A		ı			CUEET
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	83539	SHEET 1 OF 1