NOTES:

1. SUBSTRATE MATERIAL: N-SF11

2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2: MgF2

R(avg) ≤1.75% @ 400 - 700nm



- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. Rohs Compliant



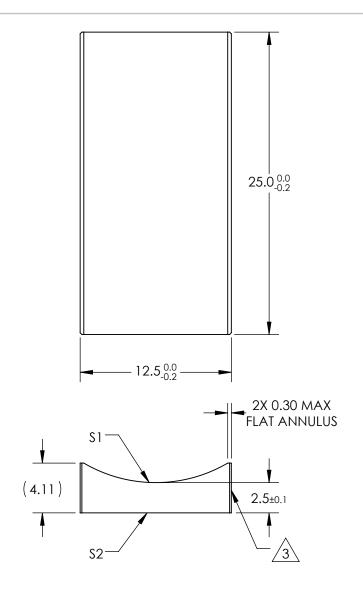

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2					
SHAPE	CONVEX	PLANO	EFL	-15		Edmund Ontion	○ ®
RADIUS	-11.77	∞	BFL	-16.4	Edmund Optics®		
SURFACE QUALITY	60-40	60-40				12.5mm H X 25mm L X -15mm FL MgF	F2
CLEAR APERTURE	11.50 X 24.00	11.50 X 24.00	THIRD ANGLE PROJECTION		TITLE	COATED, CYLINDER LENS	
COATING APERTURE	11.50 X 24.00	11.50 X 24.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	68070	SHEET 1 OF 1