

NOTES:



1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: NIR I




$R(\text{avg}) \leq 0.5\% @ 600 - 1050\text{nm}$

3. FINE GROUND SURFACE
4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

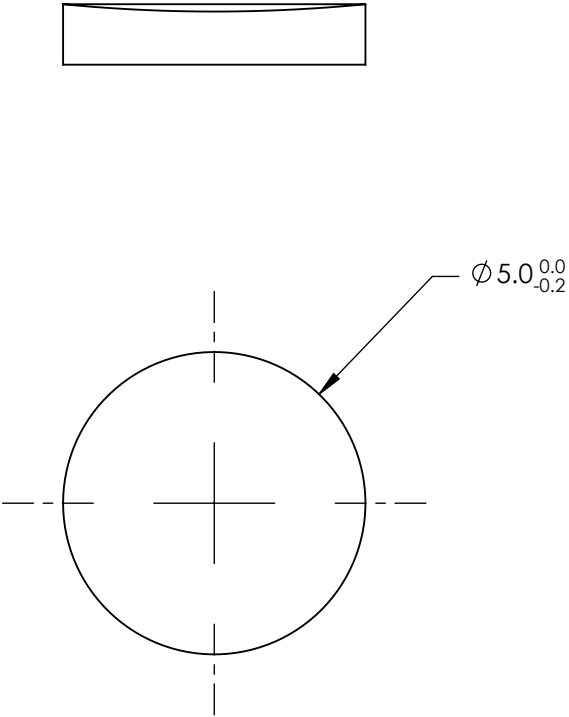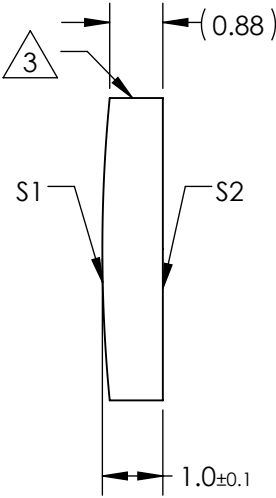

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®						
SHAPE	CONVEX	PLANO							
RADIUS	25.8	∞	EFL	50	BFL	49.34	 TITLE 5mm DIA X 50mm FL NIR I COATED, CYLINDER LENS		
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION						
CLEAR APERTURE	Ø4.00	Ø4.00			TITLE	5mm DIA X 50mm FL NIR I COATED, CYLINDER LENS			
COATING APERTURE	Ø4.00	Ø4.00							
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	69703	SHEET 1 OF 1		