

NOTES:

1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)




S1 & S2: NIR I

$R(\text{avg}) \leq 0.5\% @ 600 - 1050\text{nm}$




3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

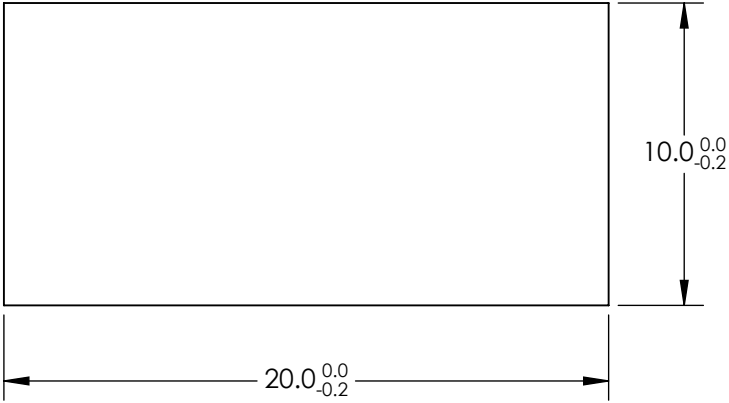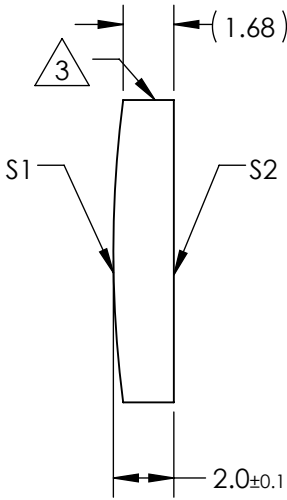

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®						
SHAPE	CONVEX	PLANO						EFL	75
RADIUS	38.72	∞	BFL	73.72					
SURFACE QUALITY	60-40	60-40							
CLEAR APERTURE	9.00 X 19.00	9.00 X 19.00			TITLE	10mm H X 20mm L X 75mm FL NIR I COATED, CYLINDER LENS			
COATING APERTURE	9.00 X 19.00	9.00 X 19.00							
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	69711	SHEET 1 OF 1		