

NOTES:



- 1. SUBSTRATE MATERIAL:
N-BK7
- 2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: NIR I



R(avg) $\leq 0.5\%$ @ 600 - 1050nm

- 3. FINE GROUND SURFACE
- 4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. RoHS COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

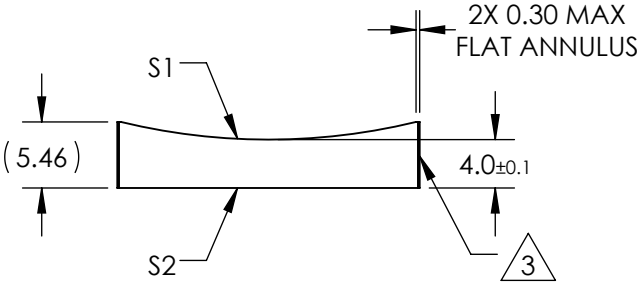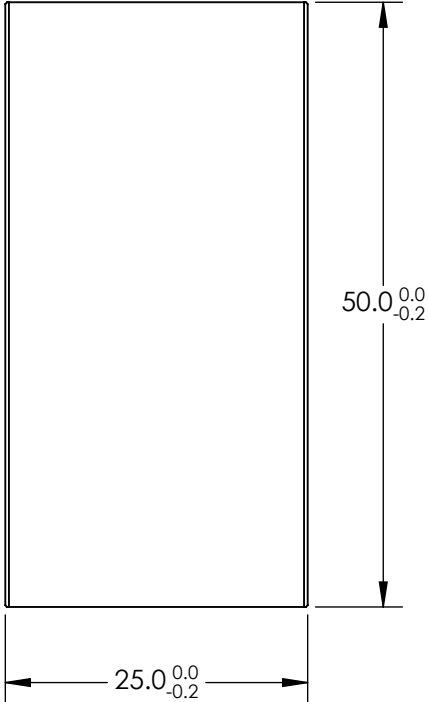

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®					
SHAPE	CONVEX	PLANO						
RADIUS	51.68	∞	EFL	-100	BFL	-102.64		
SURFACE QUALITY	60-40	60-40			TITLE	25mm H X 50mm L X -100mm FL NIR I COATED, CYLINDER LENS		
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00			ALL DIMS IN	mm	DWG NO	69829
COATING APERTURE	24.00 X 49.00	24.00 X 49.00						
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	SHEET 1 OF 1					