
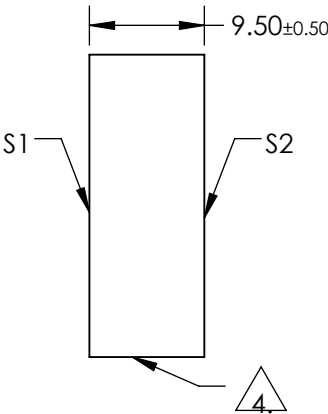
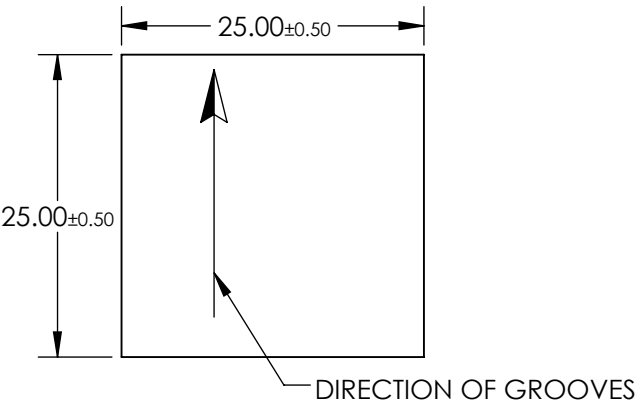


NOTES:

- 1. SUBSTRATE MATERIAL:
FLOAT GLASS
- 2. COATING (APFLOW ACROSS CLEAR APERTURE):
S1: BARE ALUMINUM
S2: NONE
- 3. BLAZE ANGLE: 26° 44'
NOMINAL BLAZE WAVELENGTH: 500nm
EFFICIENCY: 60-80% @ BLAZE WAVELENGTH

4. EDGES GROUND


- 5. RoHS COMPLIANT

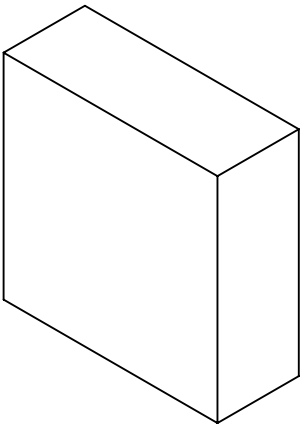

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® **Edmund Optics®**

SHAPE	S1	S2	THIRD ANGLE PROJECTION 		TITLE	GRATING DIFF 1800GR 500nm 25x25	
	PLANO	PLANO	ALL DIMS IN	mm	DWG NO	64406	SHEET 1 OF 1
CLEAR APERTURE	22.5 x 22.5	22.5 x 22.5					