

NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 8° 37' NOMINAL BLAZE WAVELENGTH: 250nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant



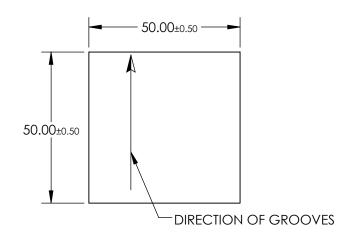



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

	\$1	\$2
SHAPE	PLANO	PLANO
CLEAR APERTURE	45.0 x 45.0	45.0 x 45.0

	Edmund	Optics®
--	--------	---------

THIRD ANGLE PROJECTION	$\phi \Box$	TITLE	GRATING DIFF 1200GR 250nm 50 x 5	50
				CLIEFT
ALL DIMS IN	mm	DWG NO	41034	SHEET 1 OF 1