
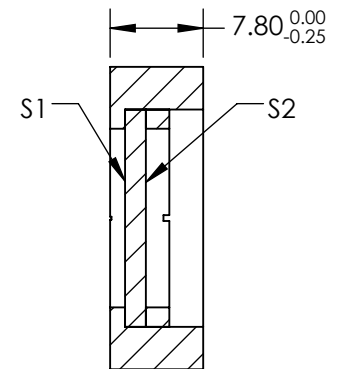
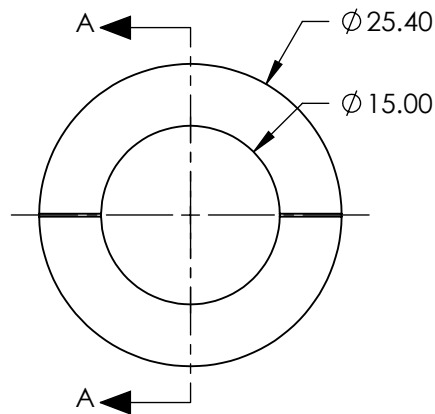



NOTES:

1. SUBSTRATE:
CRYSTAL QUARTZ
2. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: R(ABS) <0.25% @ 488nm
DAMAGE THRESHOLD: 3.5 J/cm² @10ns @ 1064nm
3. SURFACE S1 TO BE PARALLEL TO SURFACE S2 TO WITHIN <0.5 arcsec
4. RETARDANCE: $\lambda/4 \pm \lambda/200$
5. TRANSMITTED WAVEFRONT: $\lambda/10$ FOR CENTRAL 80% OF CLEAR APERTURE
6. RoHS COMPLIANT



SECTION A-A

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® **Edmund Optics®**

| | | | | | | | |
|-----------------|-------|-------|---------------------------|----|--------|--|-----------------|
| | S1 | S2 | THIRD ANGLE PROJECTION | | TITLE | Ø25.4mm, 488nm, $\lambda/4$ QUARTZ WAVEPLATE ZERO ORDER | |
| CLEAR APERTURE | Ø15.0 | Ø15.0 | | | | | |
| SURFACE QUALITY | 10-5 | 10-5 | ALL DIMS IN | mm | DWG NO | 46550 | SHEET 1 OF 1 |