

## NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLY ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. WAVELENGTH RANGE: 400-700nm ABSOLUTE DIFFRACTION EFFICIENCY: 45-65% GROOVE DENSITY: 2400 grooves/mm



5. RoHS: COMPLIANT



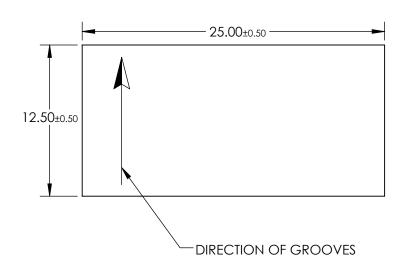

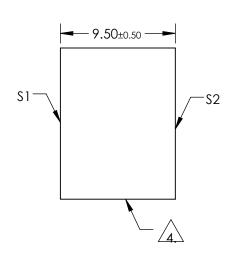

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

## **PARTS TO THIS DRAWING**

	MANUFACTURE O THIS DRAWING				<b>Edmund</b>	Optics®
	\$1	\$2	THIRD ANGLE PROJECTION	TITLE	GRATING HOLO 24000	GR VIS 12.5 X 25
SHAPE	PLANO	PLANO				CHEET
CLEAR APERTURE	11.25 x 22.5	N/A	ALL DIMS IN mm	DWG NO	43224	SHEET 1 OF 1