NOTES:


SUBSTRATE:


Alumoscilate Glass Embedded with Silver Ions

2. COATING (APPLY ACROSS COATING APERTURE)

S1 & S2: Uncoated

- 3. EFL: 0.93 4. f/#:0.93
- 5. NUMERICAL APERTURE: 0.54
 6. DESIGN WAVELENGTH: 810nm
 7. WORKING DISTANCE: 0mm
- 8. ROHS: COMPLIANT

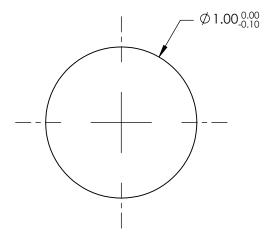

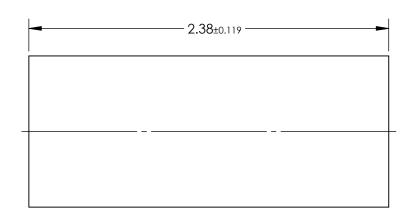

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

60 ® E	dmund C	Optics®
---------------	---------	---------

	\$1	\$2	THIRD ANGLE PROJECTION		TITLE	1.0mm Dia, 810nm DWL, 0.0mm WD, Uncoated, GRIN Lens	
SHAPE	PLANO	PLANO					
SURFACE QUALITY	40-20	40-20					
CLEAR APERTURE	Ø0.9	Ø0.9	ALL DIMS IN	mm	DWG NO	64523	SHEET 1 OF 1