NOTES:

SUBSTRATE:


Alumoscilate Glass Embedded with Silver Ions


2. COATING (APPLY ACROSS COATING APERTURE)

S1 & S2: Uncoated

EFL: 1.68
 f/#: 0.93
 NUMERICAL APERTURE: 0.52
 DESIGN WAVELENGTH: 810nm
 WORKING DISTANCE: 0mm ±0.02

8. ROHS: COMPLIANT

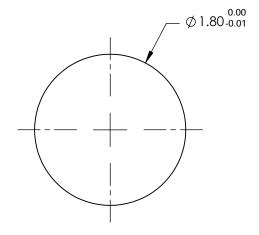

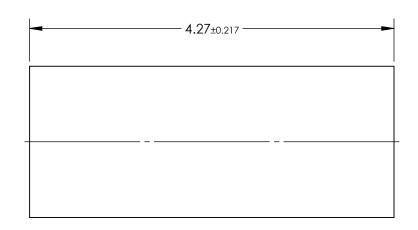

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

BO ®	Edmund	Optics®
-------------	--------	---------

	\$1	\$2	THIRD ANGLE PROJECTION		TITLE	1.8mm Dia, 810nm DWL, 0.0mm WD, Uncoated, GRIN Lens	
SHAPE	PLANO	PLANO					
SURFACE QUALITY	40-20	40-20		I		01.000.000, 01 201.0	CUEET
CLEAR APERTURE	Ø1.62	Ø1.62	ALL DIMS IN	mm	DWG NO	64525	SHEET 1 OF 1