NOTES:


SUBSTRATE:


Alumoscilate Glass Embedded with Silver Ions

2. COATING (APPLY ACROSS COATING APERTURE)

\$1 & \$2: BBAR (1310-1550nm) R(AVG) < 0.5%, 0 - 30°

- 3. EFL: 0.46 4. f/#: 0.92 5. NUMERICAL APERTURE: 0.52
- 6. DESIGN WAVELENGTH: 1550nm
- 7. WORKING DISTANCE: 0mm ±0.02
- 8. ROHS: COMPLIANT

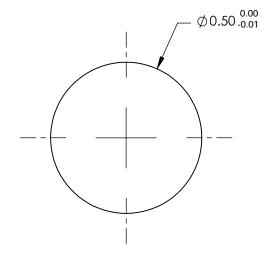

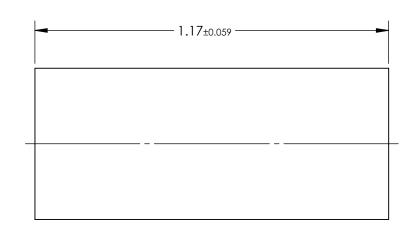

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	Edmund	Optics®
--	--------	---------

	\$1	\$2	THIRD ANGLE PROJECTION		TITLE	0.5mm Dia, 1550nm DWL, 0.0mm WD, NIR Coated, GRIN Lens	
SHAPE	PLANO	PLANO					
SURFACE QUALITY	40-20	40-20		I			CLIEFT
CLEAR APERTURE	Ø0.45	Ø0.45	ALL DIMS IN	mm	DWG NO	64545	SHEET 1 OF 1