
NOTES:

- 1. SUBSTRATE: Crystal Quartz and MgF2
- 2. COATING (APPLY ACROSS COATING APERTURE): S1 & S2: R(AVG) <0.75% @ 450 - 650nm

DAMAGE THRESHOLD, PULSED: >5 J/cm², 10ns @ 10Hz @ 1064nm

- 3. SURFACE \$1 TO BE PARALLEL TO SURFACE \$2 TO WITHIN <10 ARCSEC
- 4. RETARDANCE: $\lambda/4 \pm \lambda/100 @ 20^{\circ}C$
- 5. DESIGN WAVELENGTH: 450 650 nm
- 6. TRANSMITTED WAVEFRONT: <λ/4 @ 632nm
- 7. CONSTRUCTION: Crystalline
- 8. ROHS: COMPLIANT

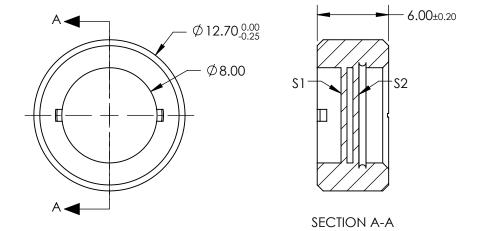

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WI DIMENSIONS ARE FOR REFERENCE ONLY							NOTICE
CO [®] Edmund Optics [®]							
	S1 S2		THIRD ANGLE PROJECTION			12.7mm Dia, 450 - 650nm, λ/4 Achromatic Waveplate	
SURFACE QUALITY	40-20 > Ø8	40-20 > Ø8	ALL DIMS IN	mm	DWG NO	39030	Sheet 1 Of 1