NOTES:

1. SUBSTRATE: D263


2. DIFFRACTION: 10° @ 550nm


3. COATING (APPLY ACROSS COATING APERTURE)

S1& S2:

R(ABS) < 0.5% @ 450 - 650nm

4. GROOVE DENSITY: 286 grooves/mm

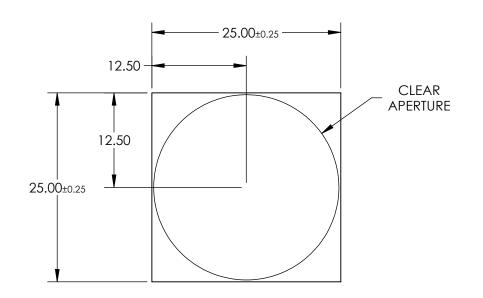

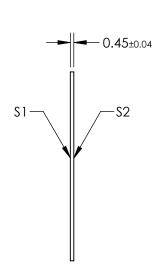

PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	
SHAPE	PLANO	PLANO	
SURFACE QUALITY	60-40	60-40	
CLEAR APERTURE	Ø24.50	Ø24.50	
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	

			Edmund Option	S®
THIRD ANGLE PROJECTION		TITLE	VIS Coated, 25mm Square, 10° Diffraction Polarization Grating	on
ALL DIMS IN	mm	DWG NO	12678	SHEET 1 OF

VIS Coated, 25mm Square, 10° Diffraction Polarization Grating	on
12678	SHEET 1 OF 1