
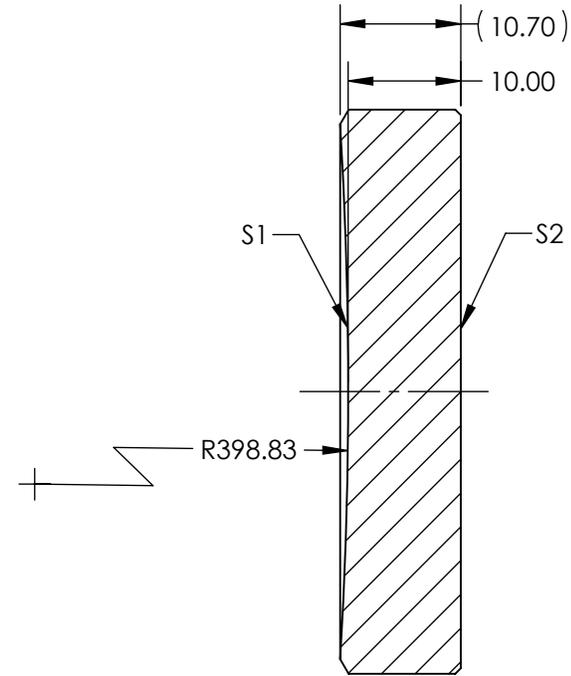


NOTES:

1. MATERIAL: N-ZK7
2. COATING TYPE: BARE ALUMINUM
3. BLAZE WAVELENGTH: 200nm
4. GROVE DENSITY (GROVES/mm): 2400
5. RoHS: COMPLIANT

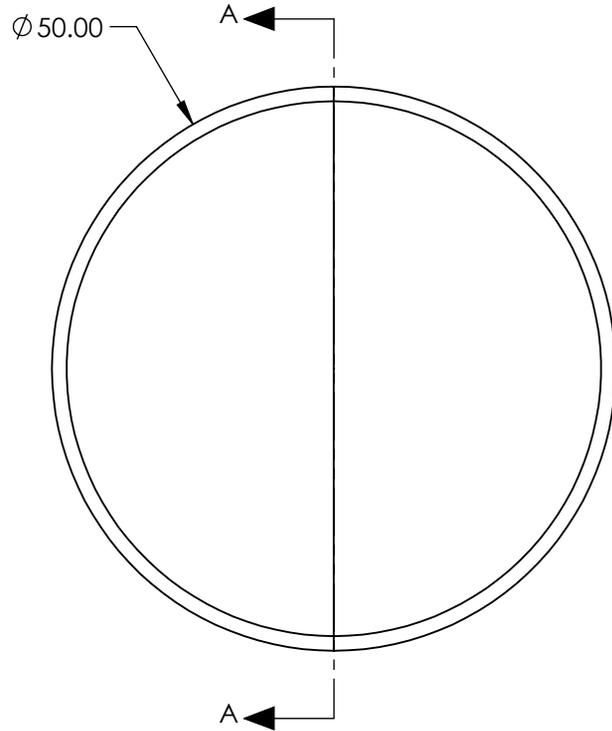

SECTION A-A

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® **Edmund Optics**®

	S1	S2	THIRD ANGLE PROJECTION		TITLE	2400 GROOVES/mm, 50mm DIA., 200nm ROWLAND CIRCLE CONCAVE DIFFRACTION GRATING	
SHAPE	CONCAVE	PLANO	ALL DIMS IN	mm	DWG NO	11539	SHEET 1 OF 1
DIFFRACTION AREA (mm)	Ø44.00	N/A					
BEVEL MAX FACE	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED					