




NOTES:

1. SUBSTRATE:
N-BK7
2. S2 TO BE PARALLEL WITH S1 TO <1 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: $R(\text{ABS}) < 0.25\% @ 532\text{nm}$
 $R(\text{ABS}) < 0.25\% @ 1064\text{nm}$
 $R(\text{AVG}) < 1.0\% @ 500 - 1100\text{nm}$

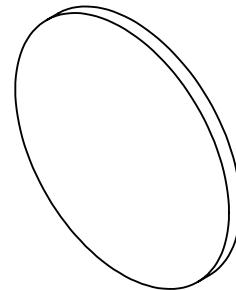

4. FINE GRIND SURFACE

5. RoHS COMPLIANT
6. SURFACE FLATNESS (P-V): $\lambda/4$ (per inch over clear aperture)

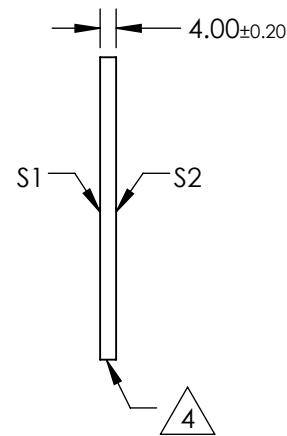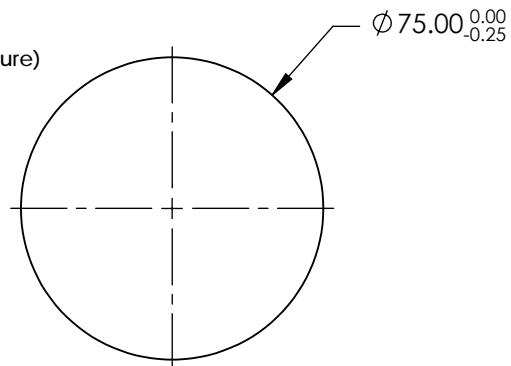

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
CLEAR APERTURE	$\varnothing 67.50$	$\varnothing 67.50$
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION		TITLE	75mm DIA., 4mm THICK, YAG-BBAR COATED, $\lambda/4$ N-BK7 WINDOW	
ALL DIMS IN	mm	DWG NO	15797	
				SHEET 1 OF 1



Edmund Optics®