## NOTES:


- 1. SUBSTRATE: HOYA GLASS: ND-50
- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN <0.02 mm


**FINE GRIND SURFACE** /3.`

- 4. COATING SPECIFICATION: S1 & S2:R(AVG) ≤0.4% @ 425 - 675nm
- 5. OPTICAL DENSITY: 0.2 +/-0.04 @400-700nm
- 6. TRANSMISSION (%): 63.0% AVERAGE FROM 400-700nm
- 7. ROHS COMPLIANT

Т





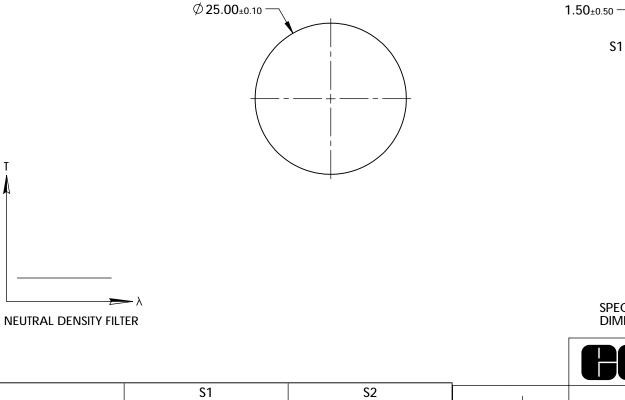

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY R

-S2

 $\sqrt{3}$ 

						Edmund Optic	<b>CS</b> ®
	S1	\$2		1.		0.2 OD, 25mm DIA., VIS 0° COATED	)
SHAPE	PLANO	PLANO			- TITLE	ABSORPTIVE ND FILTER	
SURFACE QUALITY	80-50	80-50		1			
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	13097	SHEET 1 OF 1
			ALL DIMS IN	mm	DWG NO	13097	