NOTES:

1. SUBSTRATE: POLYMER FILM XP42 ON 0.5 mm PMMA

2. OPERATING TEMPERATURE (°C): -10 to +60

3. OPERATING HUMIDITY (%): ≤80% (No Condensation)

3. WAVELENGTH RANGE: 400-700nm


4. POLARIZATION: >99.98


5. TRANSMISSION (%):


SINGLE 42 ±2

PARALLEL: 36.4 CROSSED: <0.004

6. ROHS COMPLIANT

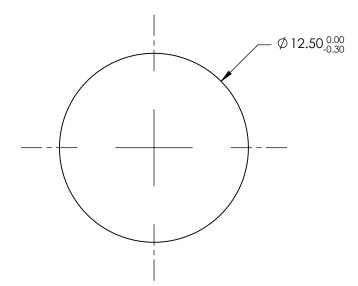



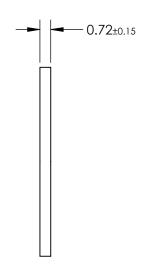

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	Edmund	Optics®
--	--------	---------

THIRD ANGLE PROJECTION	$\phi \Leftrightarrow$	TITLE	12.5mm Dia. Linear Polarizer (XP42-70)	
ALL DIMS IN	mm	DWG NO	19940	SHEET 1 OF 1