
NOTES:


- 1. SUBSTRATE: FUSED SILICA
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO 30 ARCSEC
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

\$1:Ravg >95% @ 450 - 650nm \$2:NONE



5. ROHS COMPLIANT



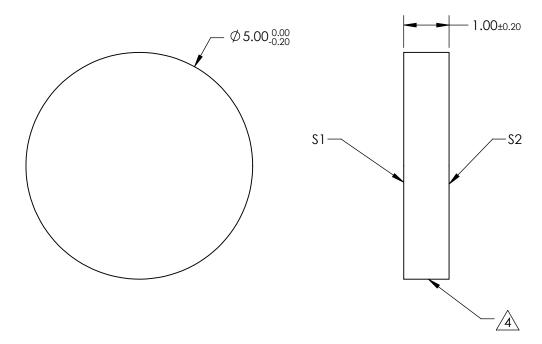

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

ENGIONO / INE I ON INEI E			Edmund Optics®	
	\$1	S2	1 .	5mm Diameter, 1mm Thick, Enhanced

	31	52	THIRD ANGLE	- TITLE	5mm Diameter, 1mm Thick, Enhanced Aluminum Coated, λ/10 Mirror		
SURFACE QUALITY	20-10	COMMERCIAL POLISH	PROJECTION (P)				
SURFACE FLATNESS	$\lambda/10$ (Measured Pre-Coating)	N/A		1			
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	26094	SHEET 1 OF 28