
## NOTES:

1. SUBSTRATE:

**FUSED SILICA** 


- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO 30 ARCSEC
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

\$1:Ravg >95% @ 450 - 650nm \$2:NONE



4. FINE GRIND SURFACE

5. ROHS COMPLIANT

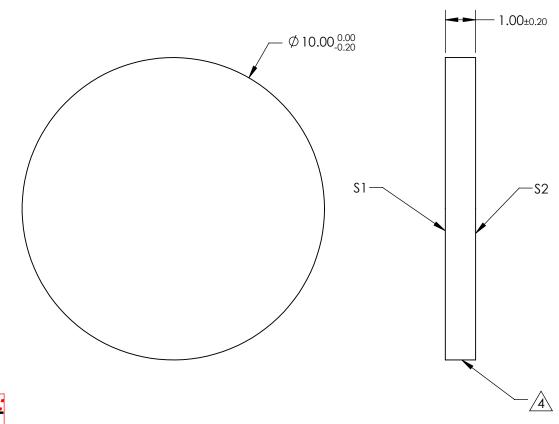

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2
SURFACE QUALITY	20-10	COMMERCIAL POLISH
SURFACE FLATNESS	$\lambda/10$ (Measured Pre-Coating)	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

SH	THIRD ANGLE PROJECTION		TITLE	10mm Diameter, 1mm Thick, Enhance Aluminum Coated, λ/10 Mirror	
ED	ALL DIMS IN	mm	DWG NO	26101	SHEET 5 OF 28