

NOTES:
1. SUBSTRATE:
FUSED SILICA



2. SURFACE S2 TO BE PARALLEL WITH S1 TO 30 ARCSEC

3. COATING (APPLY ACROSS CLEAR APERTURE)

S1:Ravg >96% @ 700 - 2000nm
Ravg >96% @ 2000 - 10,000nm
S2:NONE

4. FINE GRIND SURFACE

5. ROHS COMPLIANT

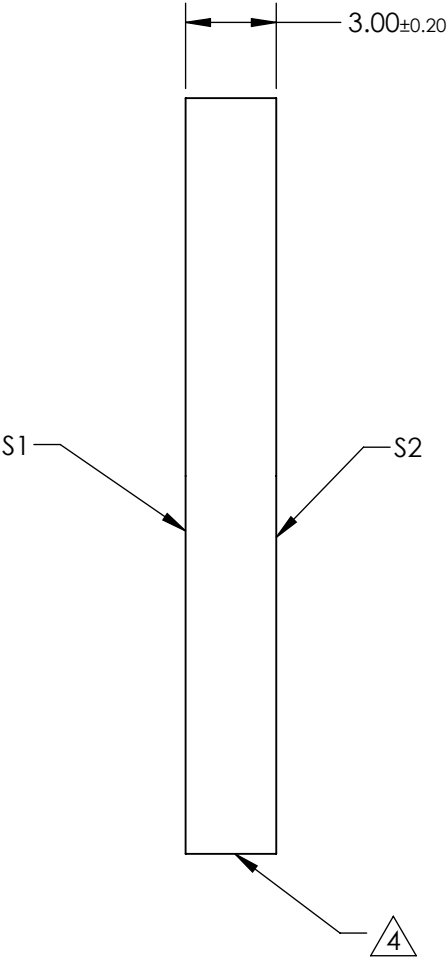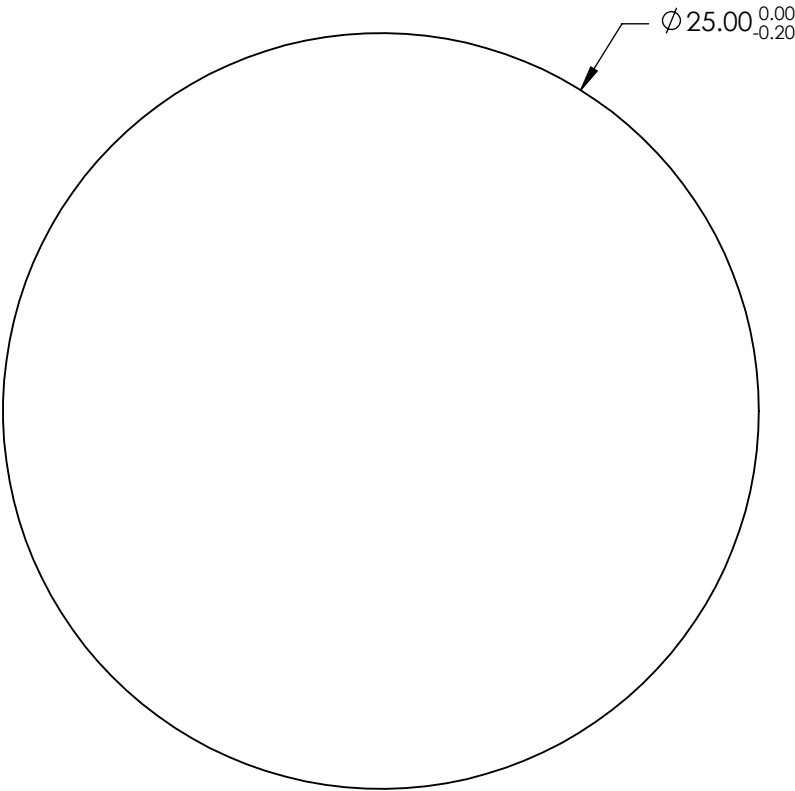

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

Edmund Optics®

	S1	S2	THIRD ANGLE PROJECTION		TITLE	25mm Diameter, 3mm Thick, Diameter Protected Gold Coated, λ/10 Mirror	
SURFACE QUALITY	20-10	COMMERCIAL POLISH	ALL DIMS IN	mm	DWG NO	26377	SHEET 23 OF 28
SURFACE FLATNESS	λ/10 (Measured Pre-Coating)	N/A					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					