
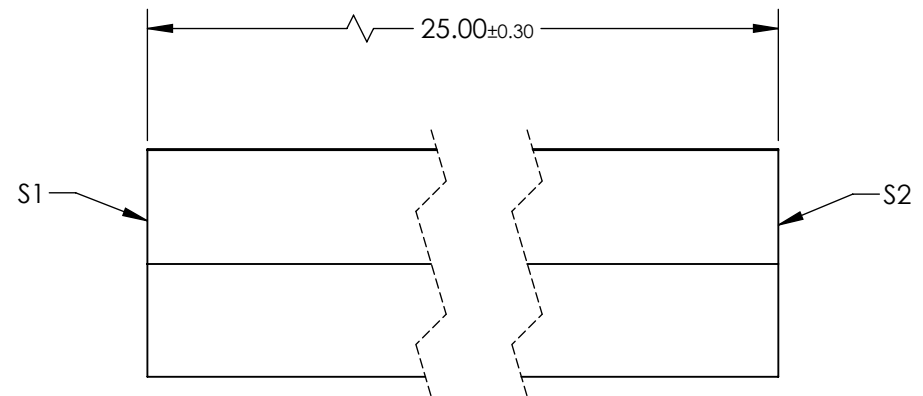
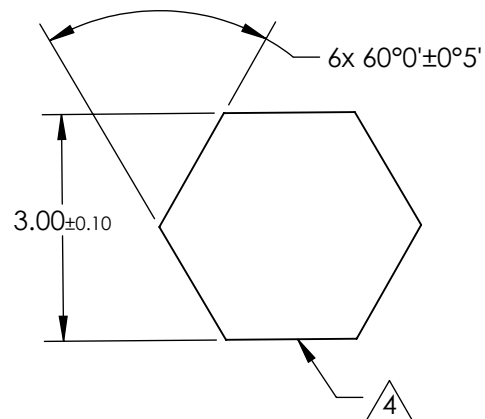


NOTES:


1. SUBSTRATE:
FUSED SILICA CORNING 7980
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1&S2: VIS-NIR (400-1000nm)
Rabs ≤0.25% @ 880nm
Ravg ≤1.25% @ 400 - 870nm
Ravg ≤1.25% @ 890 - 1000nm
4. SIX SIDEWALLS:
SURFACE ACCURACY: COMMERCIAL POLISH

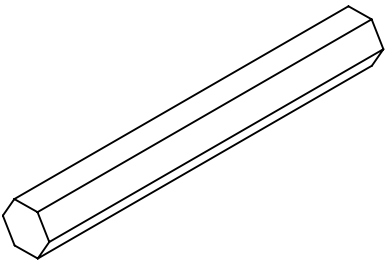

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO[®] Edmund Optics[®]

	S1	S2	<div>THIRD ANGLE PROJECTION</div> 		TITLE 3mm Aperture x 50mm L, VIS-NIR Coated, Standard NA, Fused Silica Light Pipe	
SHAPE	PLANO	PLANO				
SURFACE FLATNESS	1λ	1λ	ALL DIMS IN mm		DWG NO	26546
SURFACE QUALITY	60-40	60-40			SHEET	2 OF 24