
NOTES:


- 1. SUBSTRATE: Polymer Film XP42-40
- 2. WAVELENGTH RANGE: 400 700 nm
- 3. POLARIZATION EFFICIENCY (%):
- >99.98 (nominal at 555nm)
- 4. TRANMISSION (%):

SINGLE: 42 ±2 PARALLEL: 36.4

CROSSED: <0.004 (nominal at 555nm)

- 5. EXTINCTION RATIO: 9000:1 (nominal at 555nm)
- 6. ROHS COMPLIANT



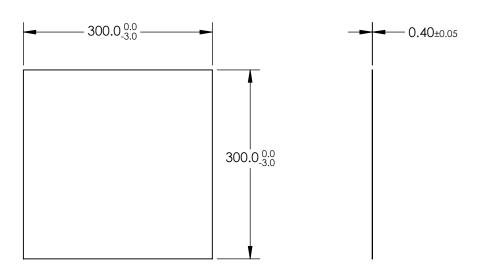

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

CONTRACT But)ptics®
---	---------

THIRD ANGLE TITLE		TITLE	300 x 300mm Linear Polarizing Film (XP42-40)		
	ALL DIMS IN	mm	DWG NO	29497	SHEET 48 OF 50