

NOTES:

1. SUBSTRATE:
FUSED SILICA
2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN <3 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1: R(avg) > 90% @ 625 - 650nm @ 45° AOI
Rs & Rp(abs) ≥99.5% @755; |Rs-Rp| ≤0.5% @ 45° AOI



S2: NONE

4. FINE GRIND SURFACE

5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY
ACROSS CLEAR APERTURE

6. CLEAR APERTURE AND COATING APERTURE ARE CENTERED ON SURFACES

7. ARROW ON EDGE POINTS TOWARDS S1

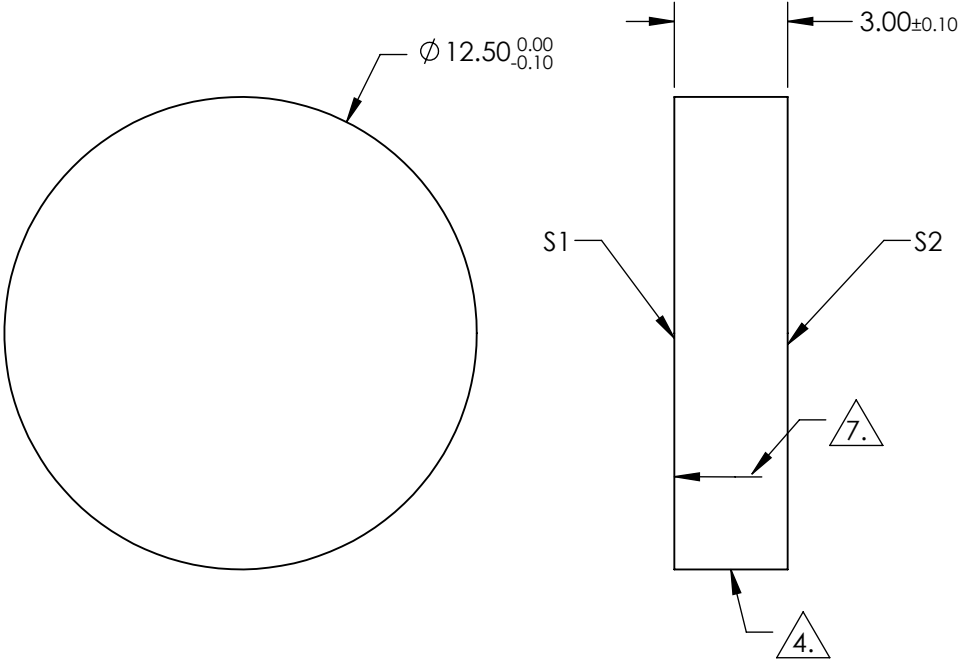

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| | S1 | S2 | <div><div><div><div><div></div><div></div></div></div><div>THIRD ANGLE PROJECTION</div></div><div><div>ALL DIMS IN</div><div>mm</div></div></div> <div><div><div><div></div><div></div></div></div><div>TITLE</div><div>12.5mm Dia., 3mm Thick, Fused Silica 755/632nm Alexandrite Mirror, 0 Deg AOI</div></div> <div><div>DWG NO</div><div>25533</div></div> <div><div>SHEET</div><div>1 OF 86</div></div> | | | |
|------------------|---------------------|---------------------|---|--|--|--|
| SHAPE | PLANO | PLANO | | | | |
| SURFACE QUALITY | 10 - 5 | COMMERCIAL POLISH | | | | |
| SURFACE FLATNESS | $\lambda/10$ | N/A | | | | |
| CLEAR APERTURE | Ø 11.25 | N/A | | | | |
| COATING APERTURE | Ø 11.25 | N/A | | | | |
| BEVEL | PROTECTED AS NEEDED | PROTECTED AS NEEDED | | | | |