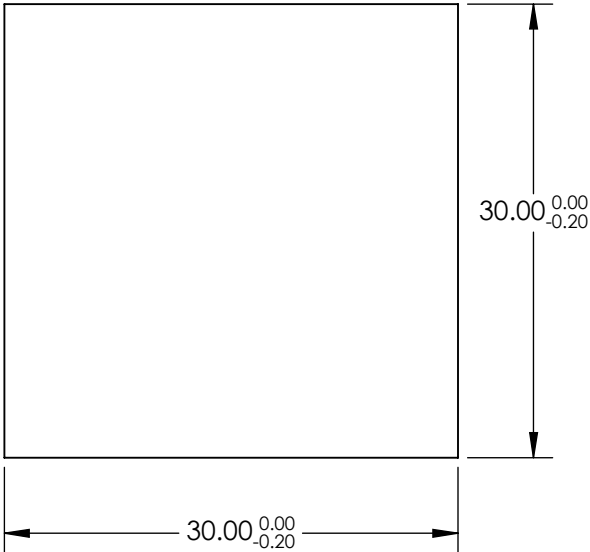
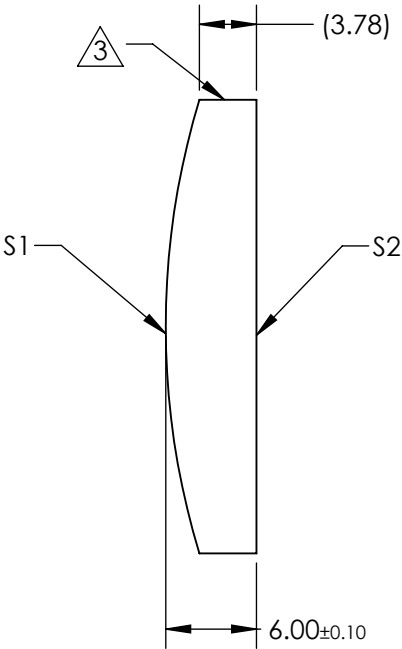


- NOTES:
- 1. SUBSTRATE:  
N-BK7
  - 2. COATING (APPLY ACROSS CLEAR APERTURE)  
  
S1 & S2: NIR I (600-1050nm)  
R(avg) ≤0.5% @ 600 - 1050nm
  - 3. FINE GROUND SURFACE
  - 4. POWER, IRREGULARITY, AND SURFACE QUALITY  
SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
  - 5. ROHS COMPLIANT

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	EFL	100.00	 Edmund Optics®		
SHAPE	CONVEX	PLANO	BFL	94.04			
RADIUS	51.68	∞			TITLE	30mm H x 30mm L x 100mm FL NIR I Coated, Illumination Grade PCX Cylinder Lens	
SURFACE QUALITY	60 - 40	60 - 40					
CLEAR APERTURE	29.00 x 29.00	29.00 x 29.00	ALL DIMS IN	mm	DWG NO	25506	SHEET 16 OF 16
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					