

NOTES:



1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS-NIR

R(abs) $\leq 0.25\%$ @ 880nm
R(avg) $\leq 1.25\%$ @ 400 - 870nm
R(avg) $\leq 1.25\%$ @ 890 - 1000nm



3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

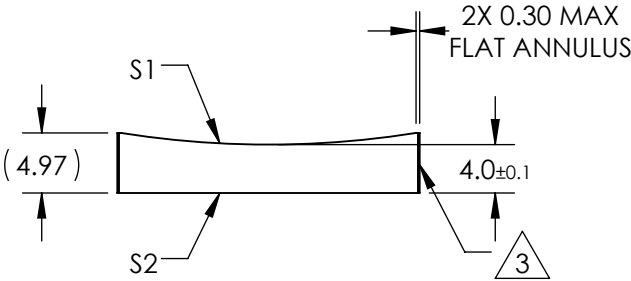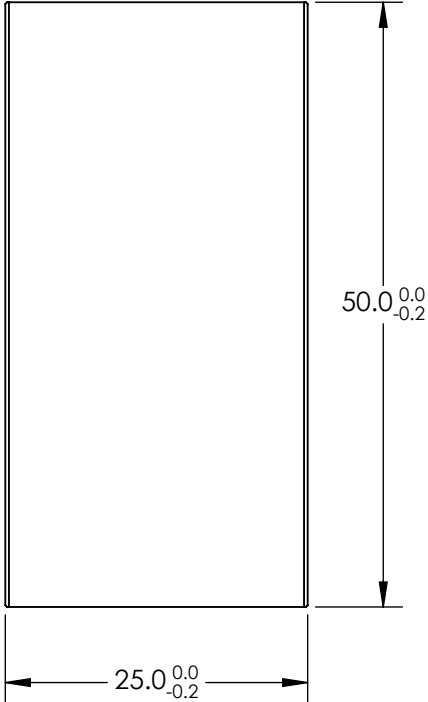

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	<div>EFL-150</div> <div>BFL-152.64</div> <div><div> Edmund Optics®</div><div>25mm H X 50mm L X -150mm FL VIS-NIR COATED, CYLINDER LENS</div></div>				
SHAPE	CONVEX	PLANO					
RADIUS	77.52	∞	<div>THIRD ANGLE PROJECTION</div>				
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00	<div>TITLE</div>				
COATING APERTURE	24.00 X 49.00	24.00 X 49.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	69850	SHEET 1 OF 1