
NOTES:

- 1. SUBSTRATE MATERIAL: FUSED SILICA
- 2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN 2 ACRMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE)
 - \$1: $R(avg) \ge 95\%$ FROM 450 650nm @ 0° AOI
 - S2: NONE
- 4. FINE GRIND SURFACE
- CLEAR APERTURE AND COATING APERTURE EDGES ARE OFFSET FROM THE PART EDGE BY 0.75mm
- 6. Rohs Compliant

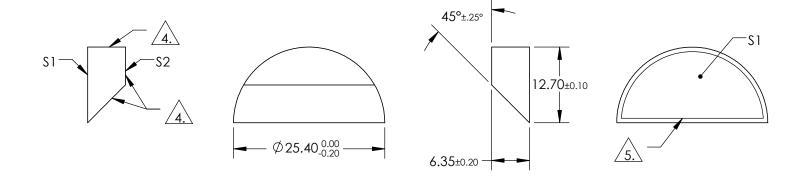

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

BO ®	Edmund	Optics®
-------------	--------	---------

	\$1	\$2	THIRD ANGLE #		TITLE	25.4mm, 1/10 WAVE, ENHANCED ALUMINUM, KNIFE-EDGE PICKOFF MIRROR	
SURFACE QUALITY	20-10	FINE GRIND					
SURFACE FLATNESS	1/10 WAVE	N/A					
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	36135	SHEET 1 OF 1