


FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING



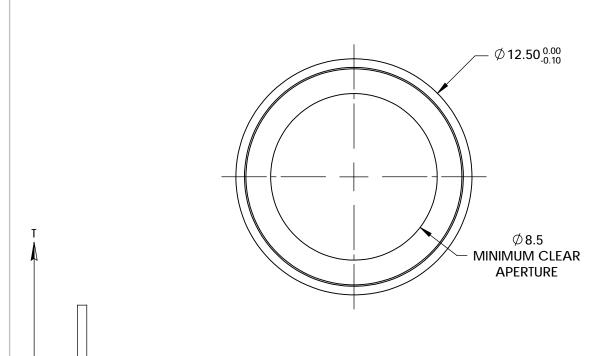

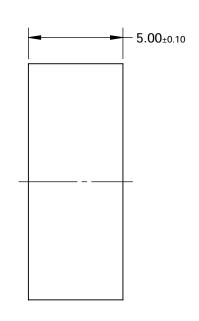

RΛ	N	n	DΛ	CC	FII	TFF	5

REV. A	VALUE
CENTER WAVELENGTH (CWL)	515nm ±1nm
FULL WIDTH HALF MAX (FWHM)	5.0 ±1nm
MINIMUM TRANSMISSION	≥85%
BLOCKING	200 - 1200nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	HARD COATED
DURABILITY	MIL-C-48497a, SEC 3.4.1
ENVIRONMENTAL	MIL-STD-810F, SEC 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	Edmund	Optics®

				-	-	
• _	THIRD ANGLE PROJECTION			515nm CWL, 12.5mm Dia., Hard Coated OD4 5nm Bandpass Filter		
	ALL DIMS IN	mm	DWG NO	39331	SHEET 1 OF 1	